

A winning recipe: Attach high performers to high performers!


features	MIDIFORST dt hyd	STARFORST hyd	SUPERFORST hyd
mulches brush and wood up to working speed	30 cm [12"] Ø 0-5 km/h	40 cm [16"] Ø 0-5 km/h	50 cm [20"] Ø 0-5 km/h
attachment interface	ISO 3-point linkage 2.cat. or universal attachment interface	ISO 3-point linkage 3.cat. or universal attachment interface	ISO 3-point linkage 3.cat. or universal attachment interface
transmission with hyd. motors*	prepared for transmission with 2 hydraulic motors	prepared for transmission with 2 hydraulic motors	prepared for transmission with 2 hydraulic motors
number belts	10	10	10
hydraulic hood	S	S	S
skids, adjustable in height	5 cm [2"]	5 cm [2"]	not adjustable
front and rear protection	chains	chains with plates	chains with plates
standard rotor	swinging hammers	fixed hammers MINI DUO	swinging hammers

S: standard

* your SEPPI M. dealer can help you choose the right motor

MIDIFORST dt is the classical SEPPI forestry mulcher. Professionals around the world love it, no matter whether with hydraulic or mechanical drive!

These mulchers are suitable not just for forestry jobs but for all sort of greenspace maintenance with vegetation such as branches, tree trunks and stumps to eliminate. These mulchers will grind up wood and leave a fine mulch behind, soon decomposing into precious soil.




two hydraulic motors for high pressure and oil flow up to 700 l/min [184 US-gal/min]



large exposure of the rotor to the trees promotes fast mulching

guard frame ALBERTA for safe felling operations (option)



OPT 014



OPT 014+410



OPT 131



OPT 131+410



OPT 222

reinforced belt cover ALBERTA




reinforced skids ALBERTA



MIDIFORST dt hyd ALBERTA edition



rotor with swinging hammers (standard)




rotor with fixed hammers MINI DUO (Wahlusstattung)

STARFORST is a compact and powerful forestry mulcher with an especially aggressive new rotor.

SUPERFORST is the top performer in the SEPPI M. forestry range for hydraulic prime movers.



SUPERFORST hyd

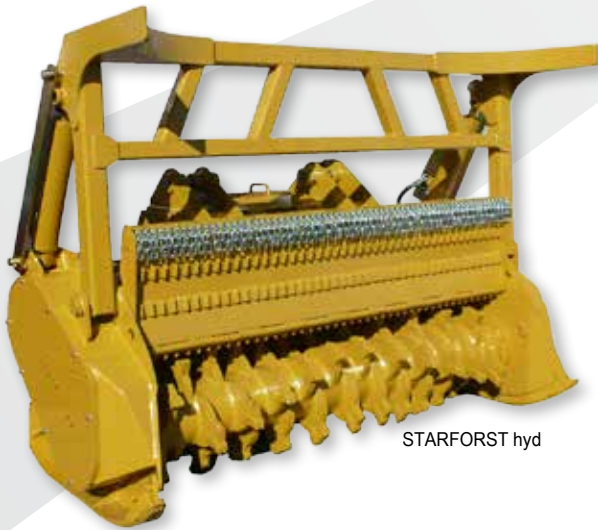

STARFORST hyd

options	MIDIFORST dt hyd	STARFORST hyd	SUPERFORST hyd	OPT
rotor with swinging hammers	S	X	S	240
rotor with fixed hammers MINI DUO	O	S	O	228
narrow skids	O	O	X	183
mechanic guard frame "ALBERTA"	O	O	O	014
hydraulic guard frame "ALBERTA"	O	O	O	131
mechanic guard frame with tools "ALBERTA"	O	O	O	014+410
hyd. guard frame with tools "ALBERTA"	O	O	O	131+410
hyd. guard frame with rakes "ALBERTA"	O	O	O	222
hydraulic block with pressure relief valve and internal hoses	O	O	O	387
2 hydraulic motors with constant flow	O	O	O	*
2 hydraulic motors with variable flow	O	X	X	*
2 automatic variable axial piston motor M-BOOST™	O	O	O	*
interface plate for different types of movers	O	O	O	*

S: standard - O: option - X: not available
* your SEPPI dealer can help you choose the right model

	working width cm ["]	overall width cm ["]	depth cm ["]	height cm ["]	weight* kg [lb]	swinging hammers #	fixed hammers #	recomm. oil flow l/min [US-gal/min]	max. pressure bar [PSI]	kW min-max	HP min-max
MIDIFORST dt hyd	200 [79]	233 [92]	128 [50]	115 [45]	1.650 [3,638]	33	44	200-350 [53-92]	350 [5,075]	110-220	150-290
	225 [89]	258 [102]	128 [50]	115 [45]	1.970 [4,340]	38	48				
	250 [98]	283 [111]	128 [50]	115 [45]	2.190 [4,830]	42	52				
STARFORST hyd	200 [79]	244 [96]	140 [55]	115 [45]	2.640 [5,820]	X	44	300-500 [79-132]	400 [5,800]	170-330	230-440
	225 [89]	269 [106]	140 [55]	115 [45]	2.760 [6,085]	X	48				
	250 [98]	294 [116]	140 [55]	115 [45]	2.920 [6,440]	X	56				
SUPERFORST hyd	200 [79]	244 [96]	140 [55]	125 [49]	3.400 [7,497]	41	42	300-700 [79-184]	400 [5,800]	190-410	250-550
	225 [89]	269 [106]	140 [55]	125 [49]	3.700 [8,160]	47	48				
	250 [98]	294 [116]	140 [55]	125 [49]	4.000 [8,820]	52	54				

* The weight of the machine refers to the standard, without options, and may vary.

